
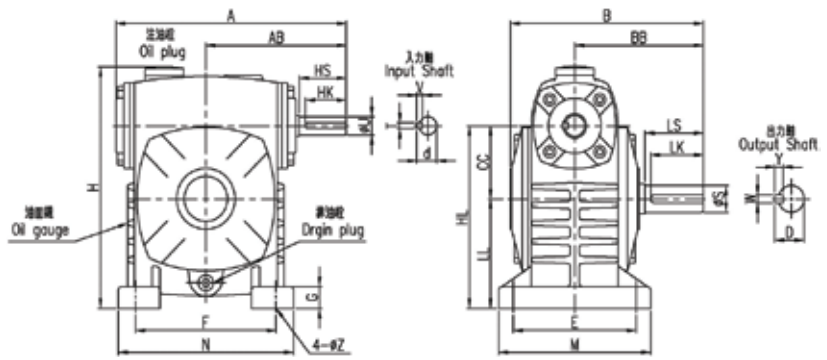


蝸輪-單段系統- PA

PA40~PA135	PA155~PA200	軸配置 SHAFT DIRECTION	
			R
			L
			D
			I
			K
			

尺寸表 DIMENSION *in millimeter

型號 Size	減速比 Ratio	馬力 HP 1/10 ~1/30 1/40 ~1/60	A	AB	B	BB	CC	E	F	H	HL	LL	M	N	G	Z	入力軸 Input Shaft				出力軸 Output Shaft				重量 (Kg)	油量 (l)
																	HS	U	d	T×V×HK	LS	S	D	W×Y×LK		
40		1/8 *	138	83	107	72	40	55	95	115	90	50	80	120	13	9	25	12	13.5	4×4×20	30	15	17	5×5×25	5.0	0.20
50		1/4 1/8	175	105	145	95	50	95	110	180	130	80	120	140	15	11	30	12	13.5	4×4×25	40	17	19	5×5×35	5.5	0.31
60		1/2 1/4	198	120	165	110	60	105	120	210	150	90	130	150	18	11	40	15	17	5×5×35	50	22	25	7×7×45	8.2	0.42
70	(特殊) 1:5	1 1/2	235	140	195	130	70	115	150	240	175	105	150	190	20	15	40	18	20	5×5×35	60	28	31	7×7×55	12.8	0.77
80	(標準) 1:10	2 1	264	160	210	140	80	135	180	270	200	120	170	220	24	15	50	22	25	7×7×45	65	32	35	10×8×60	18.0	1.18
100	1:15	3 2	325	190	260	170	100	155	220	340	250	150	190	270	25	15	50	25	28	7×7×45	75	38	41	10×8×65	33.0	2.31
120	1:20	5 3	389	230	290	190	120	180	260	405	300	180	230	320	30	18	65	30	33	7×7×55	85	45	48	12×8×70	55.0	3.16
135	1:30	7.5 5	438	260	320	210	135	200	290	455	350	215	250	350	35	18	75	35	38	10×8×65	95	55	60	15×10×80	76.0	4.10
155	1:40	10 7.5	510	302	387	252	155	220	320	490	390	235	280	390	35	20	85	40	43	10×8×75	110	60	65	15×10×95	104.0	7.00
175	1:50	15 10	556	325	410	262	175	250	350	565	435	260	310	420	40	20	85	45	48	12×8×75	110	65	69	18×11×95	148.0	8.00
200	1:60	20 15	578	340	458	305	200	290	350	625	490	290	350	420	42	22	95	50	53	12×8×85	125	70	74.5	20×12×110	201.0	9.50