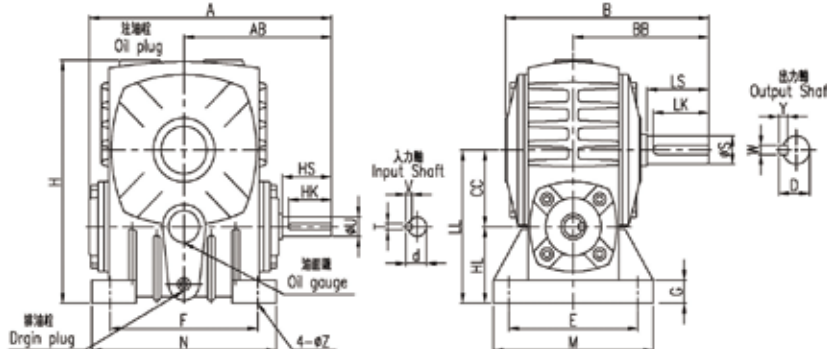


蝸輪-單段系統- PB

PB50~PB135		PB155~PB500		軸配置 SHAFT DIRECTION	
					R
					L
					D
					I
					K
					

尺寸表 DIMENSION *in millimeter

型號 Size	減速比 Ratio	馬力 HP		A	AB	B	BB	CC	E	F	H	HL	LL	M	N	G	Z	輸入軸 Input Shaft				輸出軸 Output Shaft				重量 (Kg)	油量 (l)
		1/10 ~1/30	1/40 ~1/60															HS	U	d	T×V×HK	LS	S	D	W×Y×LK		
50	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	1/4	1/8	175	105	145	95	50	95	110	180	50	100	120	140	15	11	30	12	13.5	4×4×25	40	17	19	5×5×35	5.3	0.24
60		1/2	1/4	198	120	165	110	60	105	120	210	60	120	130	150	18	11	40	15	17	5×5×35	50	22	25	7×7×45	8.1	0.33
70		1	1/2	235	140	195	130	70	115	150	240	70	140	150	190	20	15	40	18	20	5×5×35	60	28	31	7×7×55	13.4	0.50
80		2	1	264	160	210	140	80	135	180	270	80	160	170	220	24	15	50	22	25	7×7×45	65	32	35	10×8×60	18	0.77
100		3	2	325	190	260	170	100	155	220	340	100	200	190	270	25	15	50	25	28	7×7×45	75	38	41	10×8×65	30	1.50
120		5	3	389	230	290	190	120	180	260	405	120	240	230	320	30	18	65	30	33	7×7×55	85	45	48	12×8×70	52	2.35
135		7.5	5	438	260	320	210	135	200	290	455	135	270	250	350	30	18	75	35	38	10×8×65	95	55	60	15×10×80	74	3.2
155		10	7.5	510	302	387	252	155	220	320	490	135	290	280	390	35	20	85	40	43	10×8×75	110	60	65	15×10×95	101	4.0
175		15	10	556	325	410	262	175	250	350	565	160	335	310	420	40	20	85	45	48	12×8×75	110	65	69	18×11×95	143	5.7
200		20	15	578	340	458	305	200	290	350	625	175	375	350	420	42	22	95	50	53	12×8×85	125	70	74.5	20×12×110	186	7.9
225		25	20	645	375	520	335	225	330	390	705	190	415	410	470	40	27	95	55	60	15×10×90	140	80	84.5	20×12×105	205	9.4